


General Specifications

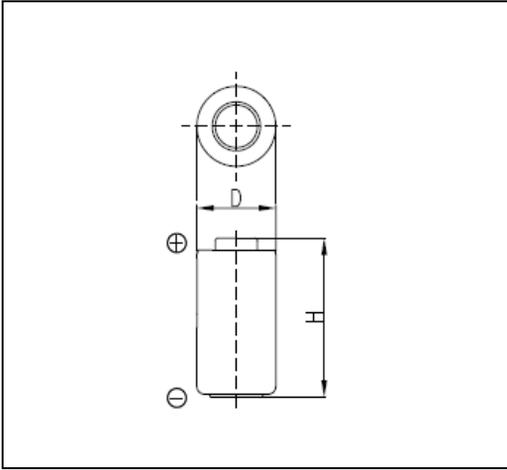

Nominal Voltage (V)		6
Nominal Capacity (mAh) *1		160
Standard Discharge Current (mA)		2.7
Operating Temperature Range (°C)		-20 ~ +60
Dimensions (mm)	Diameter (D)	13.0
	Height (H)	25.2
Approx. Weight (g)		9.1

* Expected life is 5 years at room temperature.

* Consult with FDK when considering multiple-cell construction.

*1 Nominal capacity is determined at an end voltage of 4.0V when the battery is allowed to discharge at a standard current level at +23°C.


Note) Battery Handling Precautions

English) http://www.fdk.com/battery/lithium_e/handling_precaution.html


Japanese) http://www.fdk.co.jp/battery/lithium/handling_precaution.html

Typical Characteristics


Temperature Discharge Characteristics

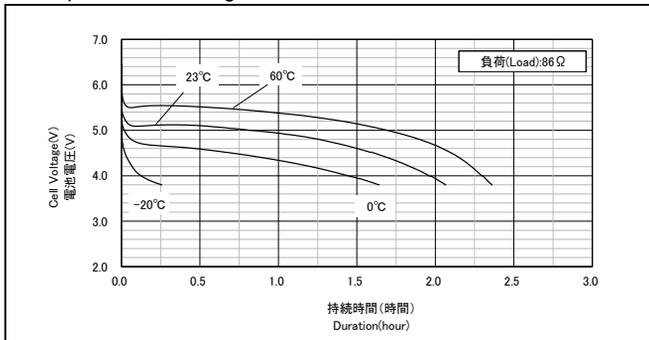


Temperature Discharge Characteristics

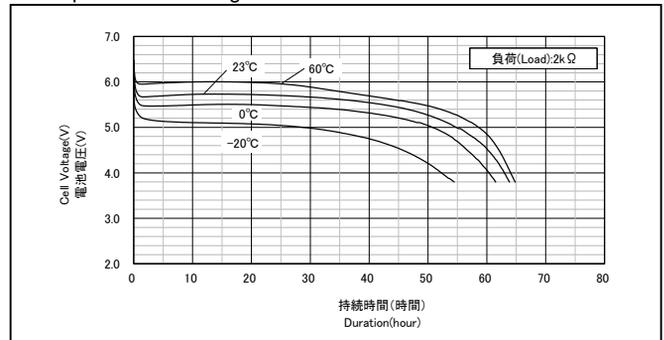


Temperature Discharge Characteristics

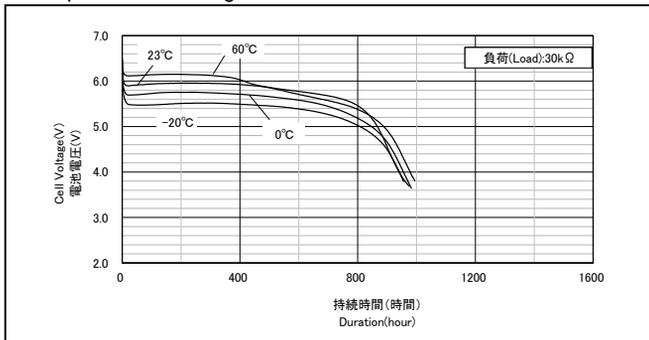

Discharge Characteristics after Storage

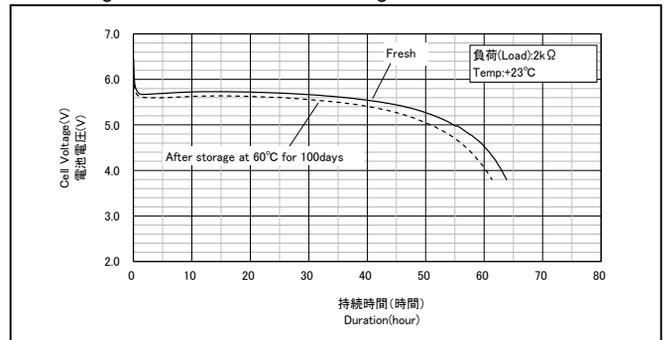

Discharge Load vs. Capacity

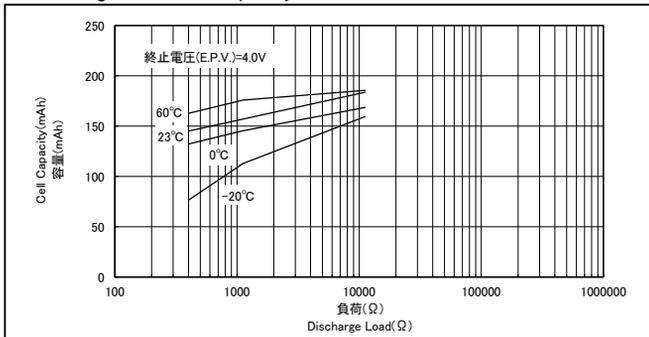

Discharge Load vs. Operating Voltage

