


Data sheet CR2/3 8LHT

General Specifications

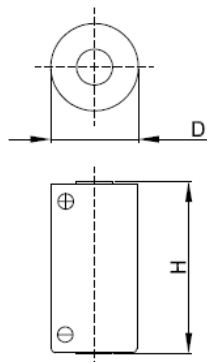

Nominal Voltage (V)		3
Nominal Capacity (mAh) *1		1800
Standard Discharge Current (mA)		0.5
Operating Temperature Range (°C) *2		-40 ~ +85
Max. Dimensions (mm)	Diameter (D)	17.0
	Height (H)	33.5
Approx. Weight (g)		16

*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.

*2 Consult FDK when using batteries at temperatures exceeding the -20°C to +60°C range.


Note) Battery Handling Precautions

English) https://www.fdk.com/product_e/lithium_e/caution/


Japanese) <https://www.fdk.co.jp/product/lithium/caution/>

Typical Characteristics

Temperature Discharge Characteristics

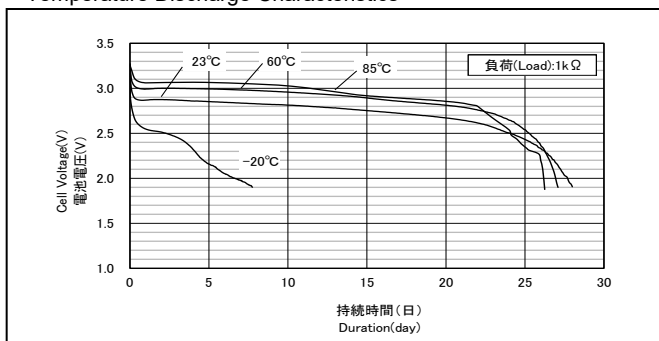


Temperature Discharge Characteristics

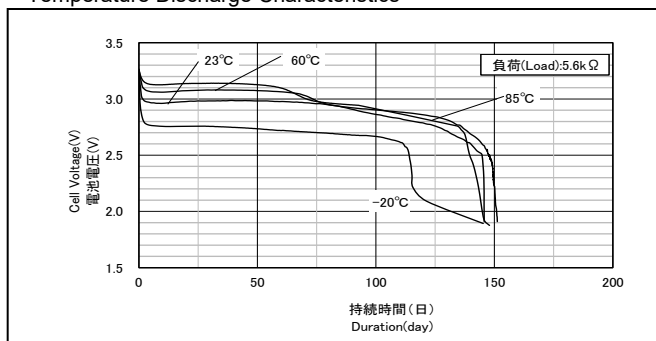


Temperature Discharge Characteristics

150kΩ data not yet available.

Discharge Characteristics after Storage

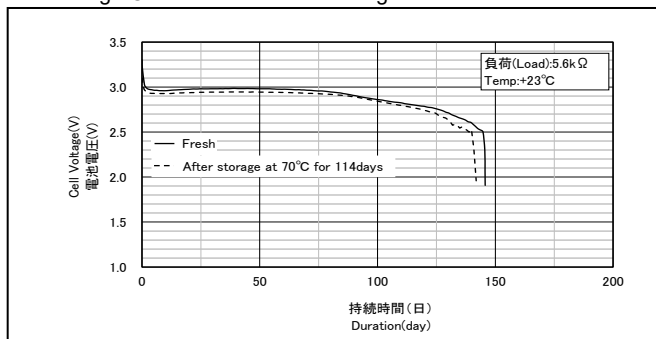

Discharge Load vs. Capacity

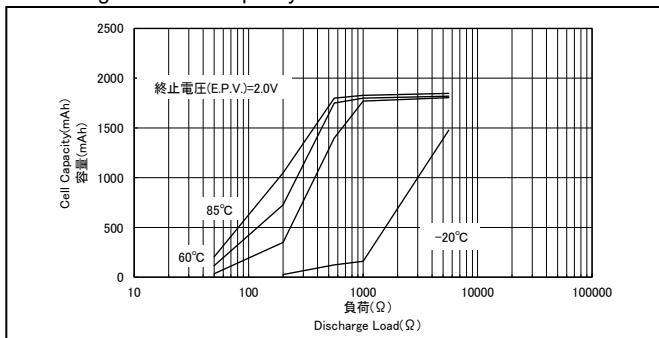

Discharge Load vs. Operating Voltage

