



25GHz Phase Shifter "FS2501"

NEW

- The highly reliable DC-BLOCK function using electromagnetic coupling is realized.
- Since the input-and-output port is composed of MSL (micro strip line), simultaneous mounting with other devices is possible.
- By the world's first circuit inclusion type, space saving in communication system is realized.



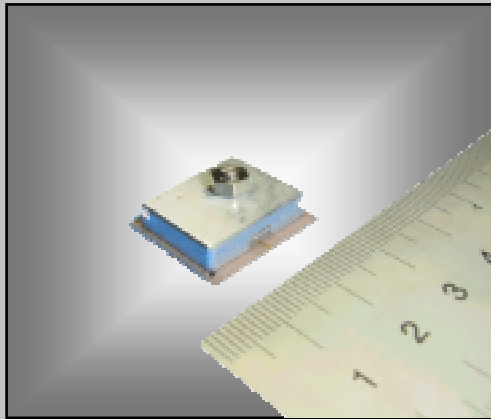


■Dimensions

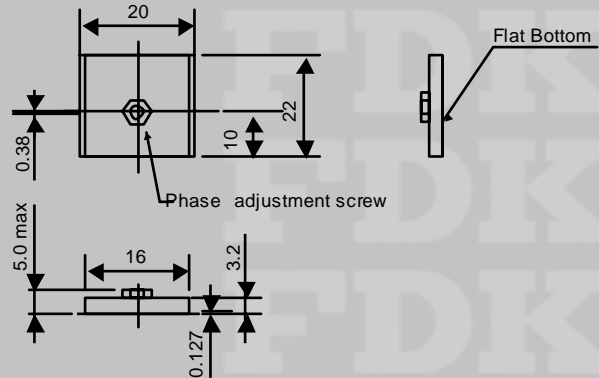

■Specification

1	Passage Loss [dB]	1.7 Max.
2	Reflective Loss [dB]	17.0 Max.
3	Phase Variable Quantity[deg]	100
4	I/O Terminal	MSL/Coaxial Cable

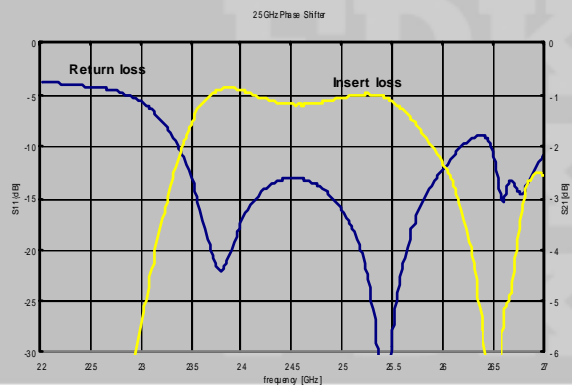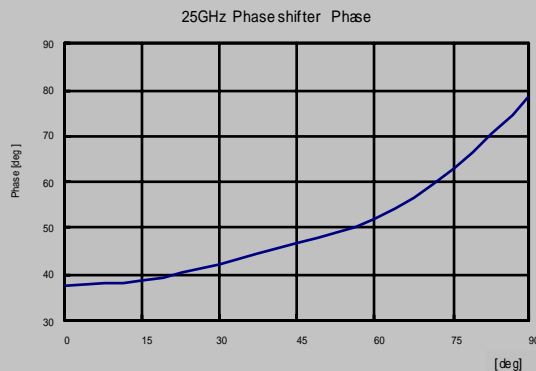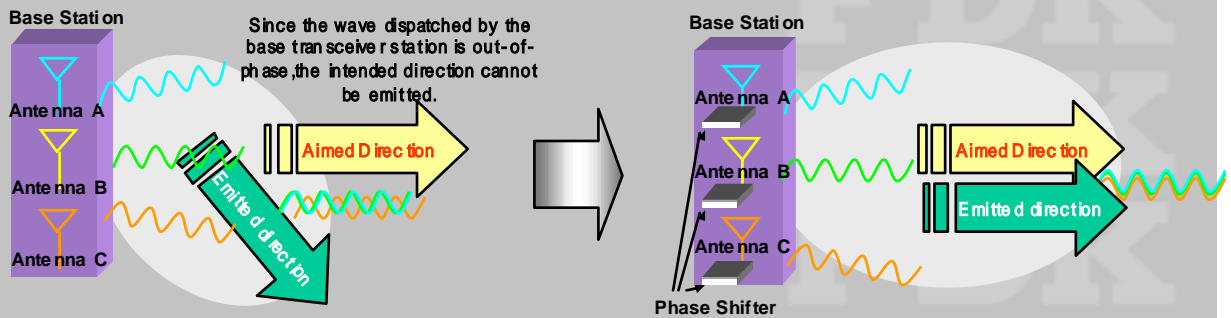

The descriptions in this catalogue are subject to change without notice.