


## 1310/1550 Wavelength Division Multiplexer


### ■ Features

- Low Insertion Loss
- High Isolation
- Low Cost

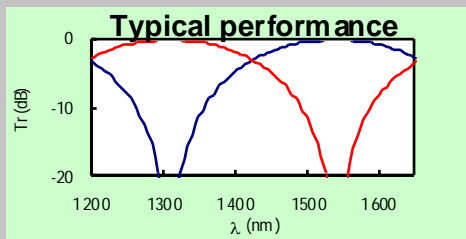

**NEW**

### ■ Dimension

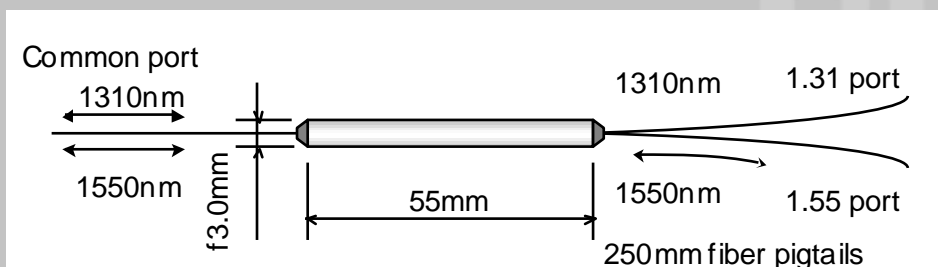

### ■ Characteristic

Parameter	Premium	Standard
Wavelength	1290 – 1330 nm 1530 – 1570 nm	
Insertion Loss (Max.)	0.4 dB	0.6 dB
PDL (Max.)	0.1 dB	0.2 dB
Isolation (Min.)	15 dB	10 dB
Directivity (Min.)	55 dB	
Size	3.0 x 55mm (inc. rubber boots, L 57mm)	
Fiber Type	SMF	

The descriptions in this catalogue are subject to change without notice.